


PT series with PLC

Outlet Dimension/外觀尺寸




Cut Out Dimension/開孔尺寸




Model	A	B	C	L	H
PT056/PT070	188mm/7.4"	143.3mm/5.64"	58mm/2.28"	175mm/6.88"	132.5mm/5.21"
PT056w/PT070w	203.5mm/8.01"	149mm/5.87"	59mm/2.32"	191mm/7.52"	138mm/5.43"

IGV0001 V1.0 12.08.2011

Outlet Dimension/外觀尺寸




Fix Screw/固定螺絲

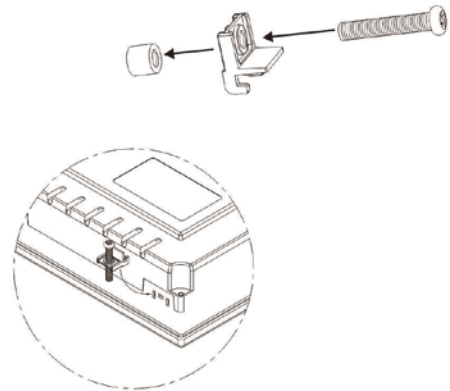

Screw each fixing screw until the bezel corner gets in contact with the panel.
使用固定螺絲固定時請注意不要鎖太緊，以避免壓迫造成其他問題。

IGV0001 V1.0 12.08.2011


Digital Input/數位輸入

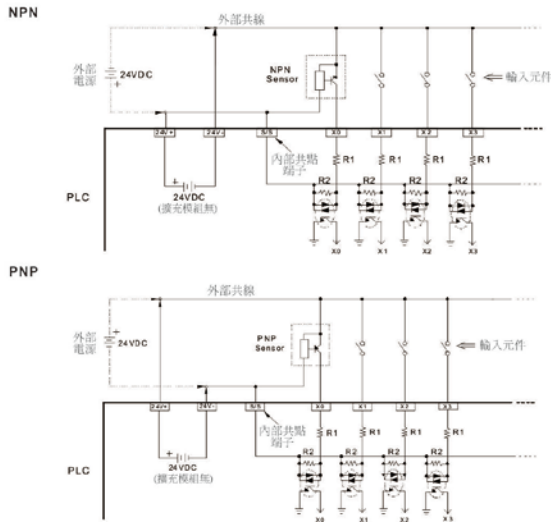

Power Supply / 電源供應




Powered by a Low Voltage / Limited Energy power source.
以低電壓提供電力 / 限制能量電源。



IGV0001 V1.0 12.08.2011

Digital Output/數位輸出

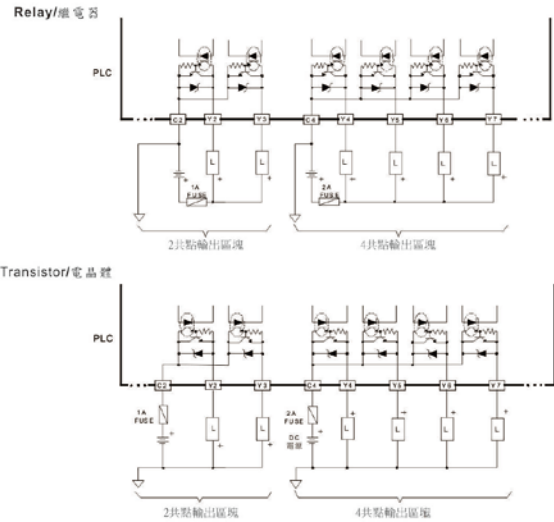


Do not open the rear cover of the panel when power is applied.
電源送電時請勿開啟後殼。




Ensure that the power supply has enough power capacity for the operation of the equipment.
送電時請確定電源設備的電源能力符合產品硬體規範。

IGV0001 V1.0 12.08.2011

PT056

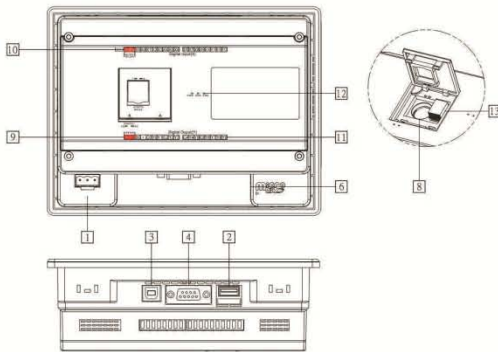

PT070

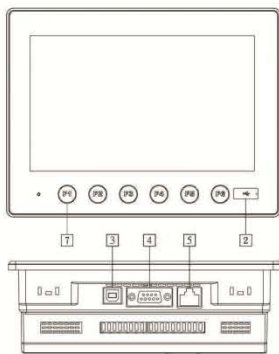

PT056/PT070/PT056w/PT070w

- 1 Power Connector/ 電源端子
- 2 USB Connector/USB 接口
- 3 USB Client/USB 接口
- 4 COM1 9Pin Female/COM1 9Pin 母座
COM3 RS232
- 5 Ethernet Port/ 網路接口
- 6 Micro SD Slot/Micro SD 插槽
- 7 Front Function Key(Optional)/ 前置功能鍵(選購)
- 8 PLC Port 0(RS232)/PLC 通訊接口Port 0
- 9 PLC Port 2(RS485)/PLC 通訊接口Port 2
- 10 Digital Input/ 數位輸入
- 11 Digital Output/ 數位輸出
- 12 LED Light/LED 狀態指示燈
- 13 PLC Memory Pack/PLC 程式記憶卡

IGV0001 V1.0 12.08.2011

IGV0001 V1.0 12.08.2011

Connections / 腳位圖

Com1 (DB-9-Female) / DB-9 母座	
Pin	Description
1	RD-422 TXD+ / RS-485+
2	RS-232 RXD
3	RS-232 TXD
4	RS-422 RXD+
5	GND (COM1, COM3)
6	RS-422 TXD- / RS-485-
7	RS-232 TXD (COM3)
8	RS-232 RXD (COM3)
9	RS-422 RXD-

Download Cable / 程式下載線

Com1			
Com1 Connector/Com1接頭 9Pin Male(公座)			PC Connector/PC接頭 9Pin Female(母座)
RXD	2	3	TXD
TXD	3	2	RXD
SG	5	5	SG

Com1			
PC Connector 9Pin Male(母座)			PLC Port0 4Pin Female(公座)
RXD	2	2	TXD
TXD	3	4	RXD
SG	5	1	SG

IGV0001 V1.0 12.08.2011

Dispose of batteries / 電池處置



Battery / 電池

MATSUSHITA/PANASONIC 3V 50mAh Vanadium Lithium Rechargeable Battery type.

⚠ Dispose of batteries according to local regulations.
廢棄電池的處置請依據使用者所在地對廢棄電池處置方式辦理。

⚠ 100% battery capacity can hold for 5 months without power supply in general environment. Please charge at least 72hrs within the hold up time.
The data in the memory may be incorrect under low battery condition.
電池電量100%時，在斷電待機狀態下能保持五個月(一般環境)，請在保持時間內充電72小時，因電量不足的情況下造成記憶體的資料不正確。

The products have been designed for use in an industrial environment in compliance with the 2004/108/CE directive. 本產品適用於工業環境並符合2004/108/CE規範。

The products have been designed in compliance with:
本產品符合以下法規:

- EN 61000-6-4
- EN 55022 Class A
- EN 61000-6-2
- EN61000-4-2
- EN61000-4-3
- EN61000-4-4
- EN61000-4-5
- EN61000-4-6
- EN61000-4-8
- EN61000-4-11

The installation of these devices into the residential, commercial and light-industrial environments allowed only in the case that special measure are taken in order to get the conformity to IEC-61000-6-3

本產品若安裝於住宅、商業及輕工業的環境時，必須加測特殊檢以符合IEC-61000-6-3

Reproduction of the contents of this copyrighted document, in whole or part without written permission of Cermate Technologies Inc., is prohibited.
本文件內容版權Cermate Technologies Inc. 所有。
非經本公司同意，請眾自行重製、拷貝或修正文件內容。

Quality Control Dept. Assurance

IGV0001 V1.0 12.08.2011